



## EVCP4

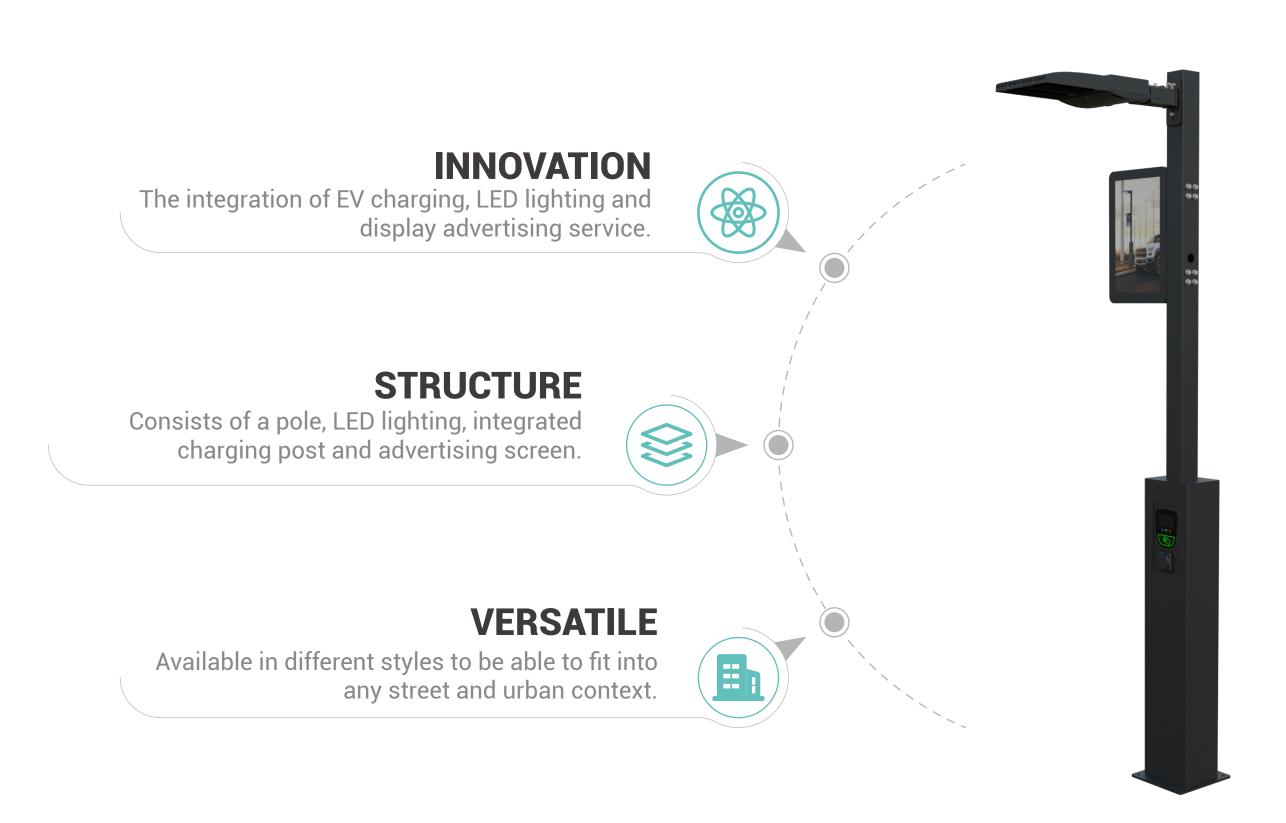

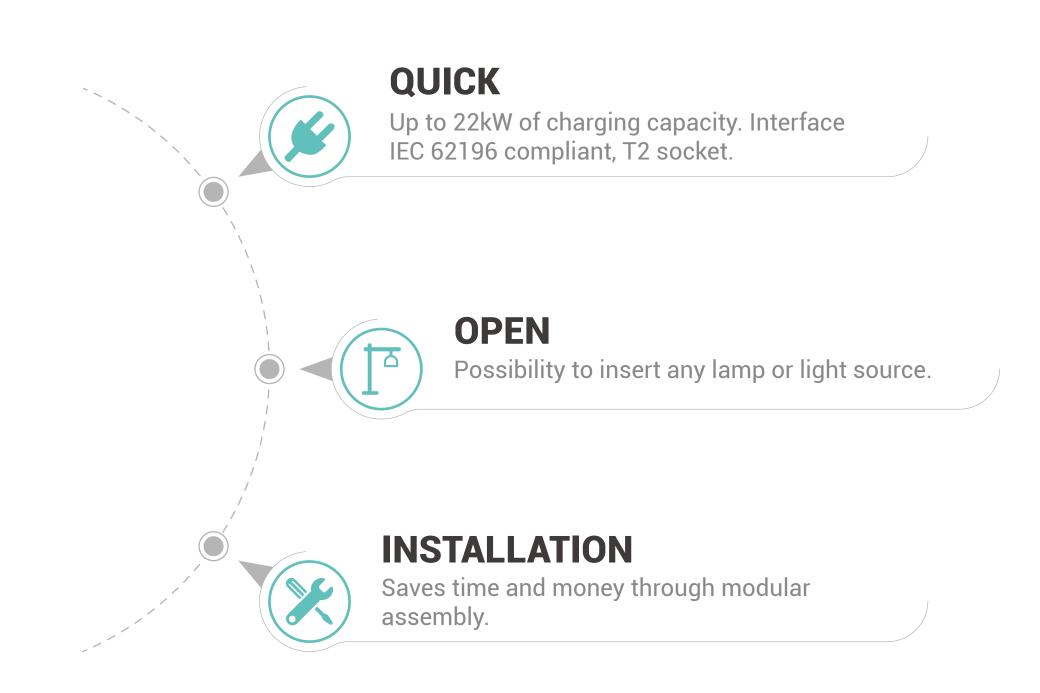

## DATASHEET

Mode 3 EV Charger	
Voltage	230Vac±10%
Amperage/Power	32A/7KW
AC Power Frequency	50-60Hz
User Authentication	RFID ISO14443
Network	LAN standard, Wi-Fi / 4G optional
Connectivity	OCPP1.6J
Operating Temperature	-30°C ~ 50°C
IP Level	IP54
IK Rating	IK08
Charging Outlet	Type2 Socket
Warranty	2-year
LCD Screen	
Dimensions	400*800mm
IP Level	IP65
Frame Material	Cast Aluminum
Voltage	220/110Vac±10%
Frequency	47-63Hz
Operating Temperature	-40°C ~ 80°C
Warranty	1-year
LED Light	
Wattages	60/80/100/120/150/200/240/320W
Voltage	230Vac±10%
IP Level	IP66
CCT	2200/3000/4000/5000/5700K
CRI	70+
Operating Temperature	-40°C ~ 50°C
Warranty	5-year

## OCPP 1.6J

## Connected successfully with 50+ global EVC platforms

