

# XIAMEN JOINT TECH. CO., LTD.

JOINT TECH, BORN FOR SUSTAINABLE ENERGY

🌐 <https://jointcharger.com>

✉ [info@jointcharger.com](mailto:info@jointcharger.com)

📍 No.98, South Dongfu Road, Haicang District, Xiamen, China

# EVD100 / DCFC

## 30KW



2 years  
limited  
warranty

### DURABILITY

IP54 and IK10 protection ratings, allowing for indoors or outdoors.



### ISO15118 & DIN70121

(Plug&Charge) enhances customer experience.



### CONNECTED

Complete with LAN & Wi-Fi & 4G connectivity, ensuring chargers are always online.



### INTERACTION

7 inch touch screen with user friendly interface.




### OCPP

OCPP 1.6J help you connect EV charger to the cloud.



### COMPATIBLE

CCS type 2 plug with 5M cable.



Color:  

# DATASHEET


Model No.		EVD100/030
AC Input	Voltage Operating Range	3ph/L1, L2, L3, N, PE
	Voltage	400V±10%
	Max. Input Amperage	45A
	Frequency	50/60Hz
	Power factor	PF≥0.98@Rated load
	Efficiency	>94%
DC Output	Maxi Power	30KW
	Voltage Operating Range	200-1000V
	Max. Amperage	80A
	Charging Outlet	CCS2 with 5m cable
Display	7" touch LCD	
User Authentication	Plug & Play / RFID / QR Code	
EV Communication	ISO15118 & DIN70121	
Network	Ethernet, Wi-Fi, 4G	
Connectivity	OCPP1.6J	
Operating Temperature	-30°C ~ 50°C	
IP Level	IP54	
Cooling	Forced Air	
Operating noise level	≤65dB	
Altitude	≤2000M	
Product Dimensions	440*677*305mm	
Package Dimensions	580*965*558mm	

# Ocpp 1.6J

Connected successfully with 50+ global EVC platforms



# DIMENSIONS

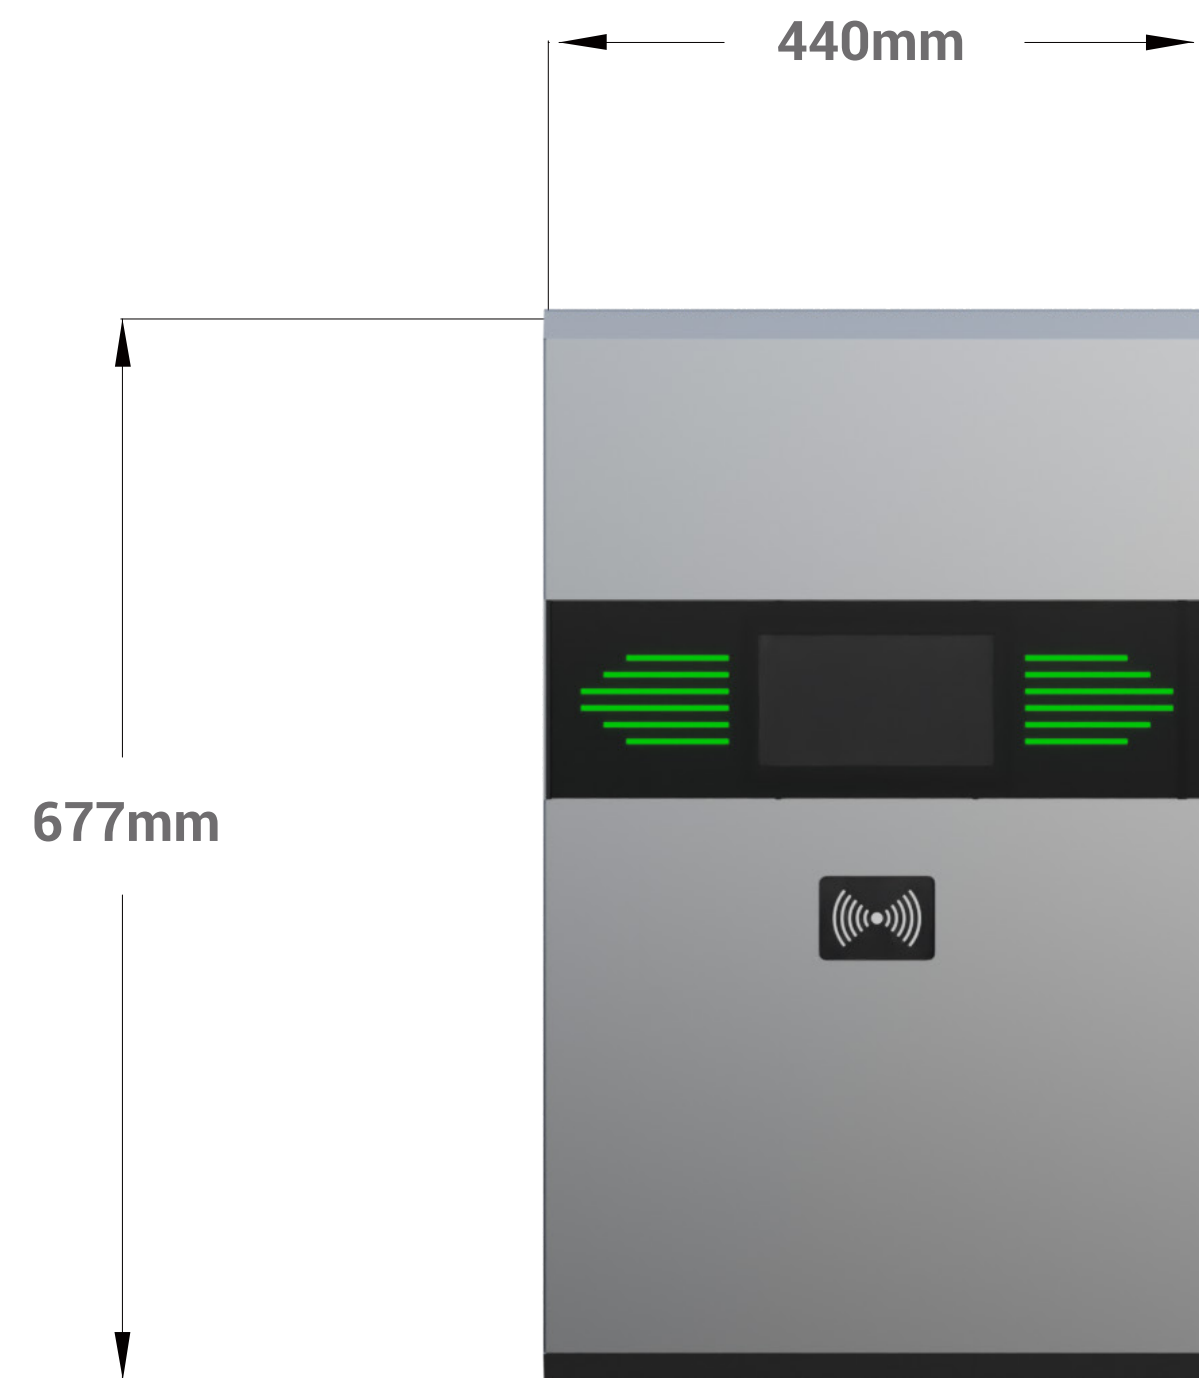

Package Dimensions  
580\*965\*558mm