



# XIAMEN JOINT TECH. CO., LTD.

JOINT TECH, BORN FOR SUSTAINABLE ENERGY

 <https://jointcharger.com>

 [info@jointcharger.com](mailto:info@jointcharger.com)

 No.98, South Dongfu Road, Haicang District, Xiamen, China



# EVC35 / LEVEL2

## UP TO 80A



### DURABILITY

IP65 and IK08 protection ratings, allowing for indoors or outdoors.



### POWERFUL

Up to 80A / 19.2kW of charging capacity.



### CHARGELAB APP

Default ChargeLab APP to remote start & stop the charger



### CONVENIENT

Adjust power as needed, 80A-48A, 48A-16A.



### OCPP

OCPP 1.6J help you connect EV charger to the cloud.



### COMPATIBLE

SAE J1772 compliant, type 1 plug with 18ft cable.





## **EVC 35** Strong and Powerful Commercial Level 2 Charger

1. Default ChargeLab APP to remote start & stop
2. Upgradable to various ChargeLab network plans, such as Dashboard, fees & revenue collection, Power management, fleet management etc.
3. CTEP qualified
4. NACS J3400 plug available
5. Fleet, Public, Workplace, Multi-family, Single-family






# DATASHEET

Model No.	EVC35/16AC	EVC35/32AC	EVC35/40AC	EVC35/48AC	EVC35/70AC	EVC35/80AC
<b>Voltage</b>	208-240Vac					
<b>Amperage/Power</b>	16A/3.8KW	32A/7.6KW	40A/9.6KW	48A/11.5KW	70A/16.8KW	80A/19.2KW
<b>AC Power Frequency</b>	50-60Hz					
<b>Display</b>	4.3" LCD					
<b>User Authentication</b>	RFID ISO14443					
<b>Connectivity</b>	LAN + 4G					
	OCPP1.6J					
<b>Operating Temperature</b>	-22°F to 122°F					
<b>IP Level</b>	Nema 3					
<b>IK Rating</b>	IK08					
<b>Cable Length</b>	18ft (25ft optional)					
<b>Net Weight</b>	13.8lbs	13.8lbs	16.8lbs	18.1lbs	19.8lbs	19.8lbs
<b>Gross Weight</b>	16.1lbs	16.1lbs	19.0lbs	20.3lbs	22.5lbs	22.5lbs
<b>Product Dimensions</b>	14.2" x 9.85" x 4.3"					
<b>Package Dimensions</b>	19.6" x 13.7" x 10.7"				19.6" x 13.7" x 12.4"	



# DIMENSIONS

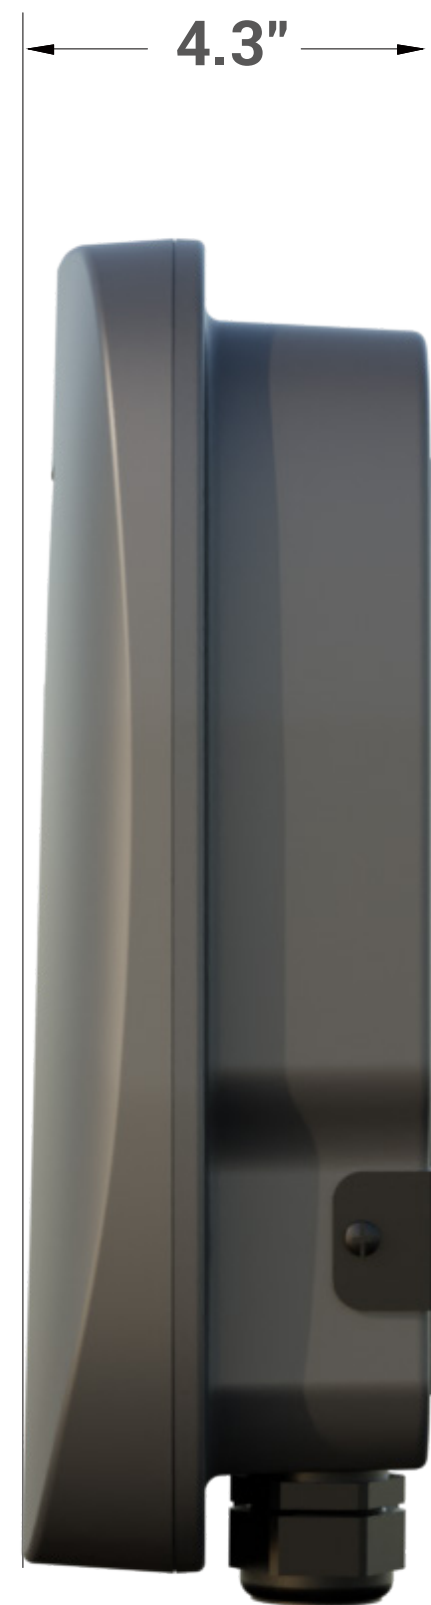

Package Dimensions  
19.6" x 13.7" x 10.7"



Package Dimensions  
19.6" x 13.7" x 12.4"